


Furnisoft
group B




001



007



015

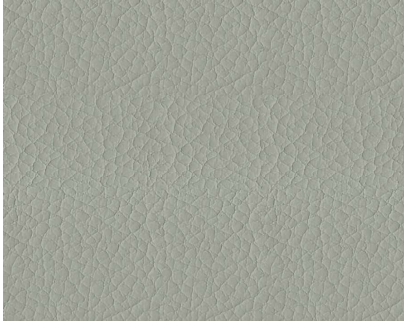

050



020



610



625



040



027



901



317



345



340



260

Furnisoft

Product information

Furnisoft is a fresh and innovative performance fabrics, engineered for end-use areas which require extra protection. It is cleanable and environmentally conscious too.

Technical information

EN	D	F	ES
Composition 53% PU, 32% Polyester, 15% Cotton	Zusammensetzung 53% PU, 32% Polyester, 15% Cotton	Composition 53% PU, 32% Polyester, 15% Cotton	Composición 53% PU, 32% Poliéster, 15% Cotton
Tensile Strength >450 N / >450 N (ISO 1421)	Zerreifestigkeit >450 N / >450 N (ISO 1421)	Rsistance  la traction >450 N / >450 N (ISO 1421)	Resistencia a la traccin >450 N / >450 N (ISO 1421)
Tear Strength >50 N / >50 N (ISO 46742)	Reifestigkeit >50 N / >50 N (ISO 46742)	La rsistance au dchirement >50 N / >50 N (ISO 46742)	Resistencia al desgarre >50 N / >50 N (ISO 46742)
Elongation At Break >3520%/ >2020% (ISO 1421)	Bruchdehnung >3520%/ >2020% (ISO 1421)	Allongement  la rupture >3520%/ >2020% (ISO 1421)	Alargamiento a la rotura >3520%/ >2020% (ISO 1421)
Weight 480 gr/m2	Gewicht 480 gr/m2	Poids 480 gr/m2	Peso 480 gr/m2
Thickness 1.10 mm (ISO 2686-3)	Dicke 1.10 mm (ISO 2686-3)	paisseur 1.10 mm (ISO 2686-3)	Espesor 1.10 mm (ISO 2686-3)
Width 140 cm	Breite 140 cm	Largeur 140 cm	Ancho 140 cm
Abrasion Resistance >40,000 Martindale Cycles (ISO 12947-2)	Scheuerfestigkeit >40,000 Martindale Fahrrder (ISO 12947-2)	Rsistance  l'abrasion >40,000 Martindale Cycles (ISO 12947-2)	Resistencia a la abrasin >40,000 Martindale Ciclos (ISO 12947-2)
Peel Adhesion >60 N (ISO 2411)	Schlhaftung >60 N (ISO 2411)	Adhrence au pelage >60 N (ISO 2411)	Adherencia al pelado >60 N (ISO 2411)
Flexometer >200,000 FLX (ISO 7854)	Flexometer >200,000 FLX (ISO 7854)	Flexometer >200,000 FLX (ISO 7854)	Flexmetro >200,000 FLX (ISO 7854)
Light Fastness (Light Colors / Dark Colors) >3.00 BW / >5.00 BW (ISO 105B02)	Lichtechtheit (Helle/Dunkle Farben) >3.00 BW / >5.00 BW (ISO 105B02)	Solidit  la lumire (Couleurs Claires/Sombres) >3.00 BW / >5.00 BW (ISO 105B02)	Solidez a la luz (Colores Claros/Oscuros) >3.00 BW / >5.00 BW (ISO 105B02)
Color Fastness (Wet / Dry) >4 GS / >5 GS (ISO 105X12)	Farbechtheit (Nass/Trocken) >4 GS / >5 GS (ISO 105X12)	Solidit de la couleur (Mouill/ Sec) >4 GS / >5 GS (ISO 105X12)	Rapidez del color (Hmedo/ Seco) >4 GS / >5 GS (ISO 105X12)