

Bello
group 1



003



016



020




065



036



322



345



055



605



600




620



901



120



300




410



417



427

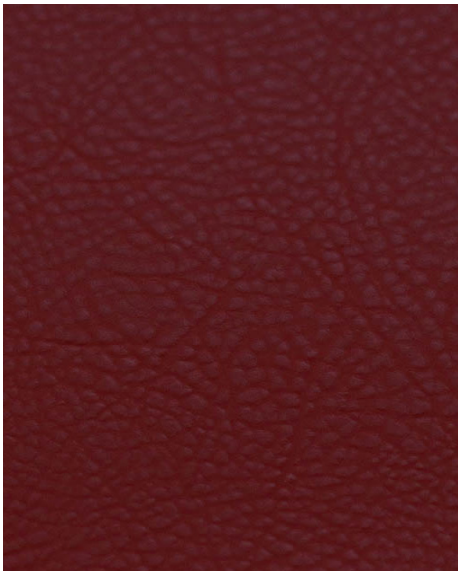

270



220



242



527



515

Bello

Product information

Bello is a unique upholstery material and it has shining and elegant appearance. It is a symbol of purity and it has been used in textiles for many years.

Technical information

EN	D	F	ES
Composition 18% Polyester, 80% PVC, 2% Polyurethane	Zusammensetzung 18% Polyester, 80% PVC, 2% Polyurethan	Composition 18% Polyester, 80% PVC, 2% Polyuréthane	Composición 18% Poliéster, 80% PVC, 2% Poliuretano
Tensile Strength >300 N / >300 N (ISO 1421)	Zerreifestigkeit >300 N / >300 N (ISO 1421)	Résistance à la traction >300 N / >300 N (ISO 1421)	Resistencia a la tracción >300 N / >300 N (ISO 1421)
Tear Strength >25 / >35 (ISO 46742)	Reifestigkeit >25 / >35 (ISO 46742)	La résistance au déchirement >25 / >35 (ISO 46742)	Resistencia al desgarre >25 / >35 (ISO 46742)
Elongation At Break 100±20% / 85±20% (ISO 1421)	Bruchdehnung 100±20% / 85±20% (ISO 1421)	Allongement à la rupture 100±20% / 85±20% (ISO 1421)	Alargamiento a la rotura 100±20% / 85±20% (ISO 1421)
Weight 500 gr/m2 (ISO 2686-2)	Gewicht 500 gr/m2 (ISO 2686-2)	Poids 500 gr/m2 (ISO 2686-2)	Peso 500 gr/m2 (ISO 2686-2)
Thickness 0.95 mm (ISO 2686-3)	Dicke 0.95 mm (ISO 2686-3)	Épaisseur 0.95 mm (ISO 2686-3)	Espesor 0.95 mm (ISO 2686-3)
Width 140 cm	Breite 140 cm	Largeur 140 cm	Ancho 140 cm
Abrasion Resistance >22,000 Martindale Cycles (DIN 53863)	Scheuerfestigkeit >22,000 Martindale Fahrräder (DIN 53863)	Résistance à l'abrasion >22,000 Martindale Cycles (DIN 53863)	Resistencia a la abrasión >22,000 Martindale Ciclos (DIN 53863)
Flexometer >100,000 FLX (ISO 7854)	Flexometer >100,000 FLX (ISO 7854)	Flexometer >100,000 FLX (ISO 7854)	Flexómetro >100,000 FLX (ISO 7854)
Light Fastness (Light Colors / Dark Colors) >3.00 BW / >5.00 BW (ISO 105B02)	Lichtechtheit (Helle/Dunkle Farben) >3.00 BW / >5.00 BW (ISO 105B02)	Solidité à la lumière (Couleurs Claires/Sombres) >3.00 BW / >5.00 BW (ISO 105B02)	Solidez a la luz (Colores Claros/Oscuros) >3.00 BW / >5.00 BW (ISO 105B02)
Color Fastness (Wet / Dry) >4 GS / >4 GS (ISO 105X12)	Farbechtheit (Nass/Trocken) >4 GS / >4 GS (ISO 105X12)	Solidité de la couleur (Mouillé/ Sec) >4 GS / >4 GS (ISO 105X12)	Rapidez del color (Húmedo/ Seco) >4 GS / >4 GS (ISO 105X12)