

Furnisoft

group 2

Note: Photographic fabric scans are not colour accurate.
Always request actual fabric samples before ordering.




001



007



015

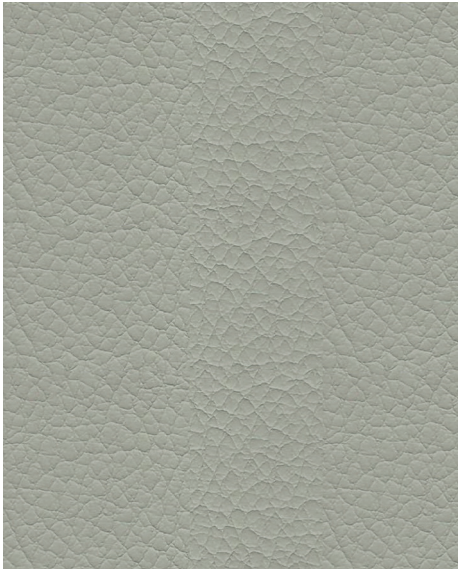

050



020



610



625



040



027



901



317



360



345



340



260

Furnisoft

Product information

Furnisoft is a fresh and innovative performance fabrics, engineered for end-use areas which require extra protection. It is cleanable and environmentally conscious too.

Technical information

EN	D	F	ES
Composition 53% PU, 32% Polyester, 15% Cotton	Zusammensetzung 53% PU, 32% Polyester, 15% Cotton	Composition 53% PU, 32% Polyester, 15% Cotton	Composición 53% PU, 32% Poliéster, 15% Cotton
Tensile Strength >450 N / >450 N (ISO 1421)	Zerreifestigkeit >450 N / >450 N (ISO 1421)	Rsistance  la traction >450 N / >450 N (ISO 1421)	Resistencia a la traccin >450 N / >450 N (ISO 1421)
Tear Strength >50 N / >50 N (ISO 46742)	Reifestigkeit >50 N / >50 N (ISO 46742)	La rsistance au dchirement >50 N / >50 N (ISO 46742)	Resistencia al desgarre >50 N / >50 N (ISO 46742)
Elongation At Break >3520%/ >2020% (ISO 1421)	Bruchdehnung >3520%/ >2020% (ISO 1421)	Allongement  la rupture >3520%/ >2020% (ISO 1421)	Alargamiento a la rotura >3520%/ >2020% (ISO 1421)
Weight 480 gr/m2	Gewicht 480 gr/m2	Poids 480 gr/m2	Peso 480 gr/m2
Thickness 1.10 mm (ISO 2686-3)	Dicke 1.10 mm (ISO 2686-3)	paisseur 1.10 mm (ISO 2686-3)	Espesor 1.10 mm (ISO 2686-3)
Width 140 cm	Breite 140 cm	Largeur 140 cm	Ancho 140 cm
Abrasion Resistance >40,000 Martindale Cycles (ISO 12947-2)	Scheuerfestigkeit >40,000 Martindale Fahrrder (ISO 12947-2)	Rsistance  l'abrasion >40,000 Martindale Cycles (ISO 12947-2)	Resistencia a la abrasin >40,000 Martindale Ciclos (ISO 12947-2)
Peel Adhesion >60 N (ISO 2411)	Schlhaftung >60 N (ISO 2411)	Adhrence au pelage >60 N (ISO 2411)	Adherencia al pelado >60 N (ISO 2411)
Flexometer >200,000 FLX (ISO 7854)	Flexometer >200,000 FLX (ISO 7854)	Flexometer >200,000 FLX (ISO 7854)	Flexmetro >200,000 FLX (ISO 7854)
Light Fastness (Light Colors / Dark Colors) >3.00 BW / >5.00 BW (ISO 105B02)	Lichtechtheit (Helle/Dunkle Farben) >3.00 BW / >5.00 BW (ISO 105B02)	Solidit  la lumire (Couleurs Claires/Sombres) >3.00 BW / >5.00 BW (ISO 105B02)	Solidez a la luz (Colores Claros/Oscuros) >3.00 BW / >5.00 BW (ISO 105B02)
Color Fastness (Wet / Dry) >4 GS / >5 GS (ISO 105X12)	Farbechtheit (Nass/Trocken) >4 GS / >5 GS (ISO 105X12)	Solidit de la couleur (Mouill/ Sec) >4 GS / >5 GS (ISO 105X12)	Rapidez del color (Hmedo/ Seco) >4 GS / >5 GS (ISO 105X12)