

King  
group 3



13717



06



13742



13591



13743



13719



13723-A



13721




13722



13592




17561




17562



13823




17565




17567




13824




17566




13822

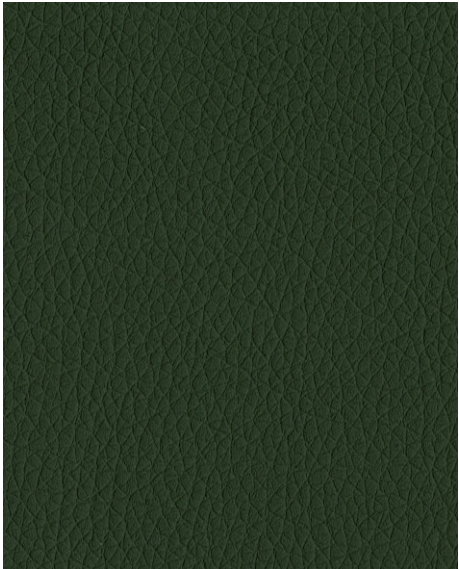

17563




13724-B




13725-A



17560



17568



13727

# King

## Product information

King has a soft touch and high quality which creates a lot of using areas for many years. Comprising a variety of designs, the range offers a mixed palette of subtle trend colours and traditional brights.

### Technical information

| EN                                                                       | D                                                                       | F                                                                                     | ES                                                                                         |
|--------------------------------------------------------------------------|-------------------------------------------------------------------------|---------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------|
| Composition<br>76% PVC, 12% Polyester, 2% PU4                            | Zusammensetzung<br>76% PVC, 12% Polyester, 2% PU4                       | Composition<br>76% PVC, 12% Polyester, 2% PU4                                         | Composición<br>76% PVC, 12% Poliéster, 2% PU4                                              |
| Weight<br>658 gr/m2 (TS 6450)                                            | Gewicht<br>658 gr/m2 (TS 6450)                                          | Poids<br>658 gr/m2 (TS 6450)                                                          | Peso<br>658 gr/m2 (TS 6450)                                                                |
| Thickness<br>0.85 mm (ISO 2589)                                          | Dicke<br>0.85 mm (ISO 2589)                                             | Épaisseur<br>0.85 mm (ISO 2589)                                                       | Espesor<br>0.85 mm (ISO 2589)                                                              |
| Width<br>138/140cm (TS 4119)                                             | Breite<br>138/140cm (TS 4119)                                           | Largeur<br>138/140cm (TS 4119)                                                        | Ancho<br>138/140cm (TS 4119)                                                               |
| Abrasion Resistance<br>40,000 Martindale Cycles                          | Scheuerfestigkeit<br>40,000 Martindale Fahrräder                        | Résistance à l'abrasion<br>40,000 Martindale Cycles                                   | Resistencia a la abrasión<br>40,000 Martindale Ciclos                                      |
| Bursting Strength<br>>600 kPa (BS EN ISO 5470-1: 1999)                   | Berstfestigkeit<br>>600 kPa (BS EN ISO 5470-1: 1999)                    | Force débordante<br>>600 kPa (BS EN ISO 5470-1: 1999)                                 | Resistencia al estallido<br>>600 kPa (BS EN ISO 5470-1: 1999)                              |
| Elongation Strength<br>Weft: 2853g - Warp: 5803g (BS EN ISO 4674-1:1999) | Reißfestigkeit<br>Schuss : 2853g - Kette: 5803g (BS EN ISO 4674-1:1999) | Résistance à la Allongement<br>Chaîne de trame: 2853g - 5803g (BS EN ISO 4674-1:1999) | Resistencia al alargamiento<br>Urdimbre de la trama: 2853g - 5803g (BS EN ISO 4674-1:1999) |
| Color Fastness<br>5 (DIN EN ISO 105 - B02: 2002)                         | Farbechtheit<br>5 (DIN EN ISO 105 - B02: 2002)                          | Solidité de la couleur<br>5 (DIN EN ISO 105 - B02: 2002)                              | Rapidez del color<br>5 (DIN EN ISO 105 - B02: 2002)                                        |
| Flammability<br>Pass (BS 5852-1: 1979)                                   | Feuersicherung<br>Bestehen (BS 5852-1: 1979)                            | Flammabilité<br>Passer (BS 5852-1: 1979)                                              | Inflamabilidad<br>Pasar (BS 5852-1: 1979)                                                  |